


BIANCOBIANCO

HOME COLLECTION

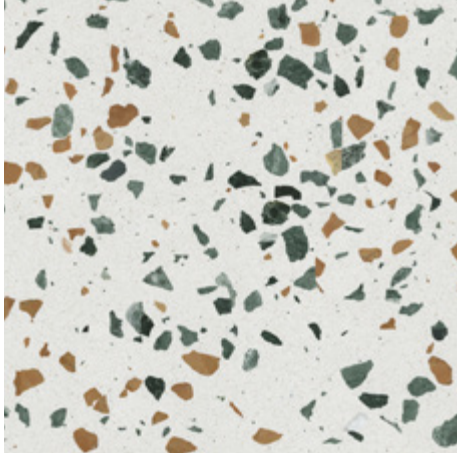

Product
BEIGE NETTUNO
TERRAZZO

cod. TZ_BN

Product name:	EM BEIGE NETTUNO
Composition:	4 - 6 % Resin, 94 - 96 % Marble
Pre-consumer recycled:	0 % by weight
Surface finish:	Polished, Honed, Brushed, Antique
Slabs size (cm):	305x124
Slabs thickness* (cm):	1.2 - 2.0 - 3.0 - 4.0
Tiles size* (cm):	30x30x1.2 - 40x40x1.2 - 60x60x1.2 60x30x1.2 - 50x30x1.2 - 60x40x1.2

* Other sizes and thicknesses available on request

CHARACTERISTICS	STANDARD	VALUE	NOTES
Apparent density	EN 14617-1	2500 - 2650 Kg/m ³	
Water absorption	EN 14617-1	≤ 0,15 %	
Flexural strength	EN 14617-2	15 - 25 MPa	
Abrasion resistance	EN 14617-4	37 - 40 mm	
Frost resistance	EN 14617-5	KM ₁₂₅ 0,8 - 1,2	
Thermal shock resistance	EN 14617-6	$\Delta m\% \leq 0,12 \%$ $\Delta R_{f,20}\% \leq 30 \%$	Test temperature: 70°C
Impact resistance	EN 14617-9	1,0 - 2,0 J ≥ 1,5 J	For thickness 9 mm, 12 mm For thickness 20 mm, 30 mm
Chemical resistance	EN 14617-10	C1	
Linear thermal expansion coefficient	EN 14617-11	12 - 18 x 10 ⁻⁶ °C ⁻¹	
Dimensional stability	EN 14617-12	Class A (<0,3 mm)	
Electrical resistivity	EN 14617-13	$\rho_s \geq 10^{10} \Omega$ $\rho_v \geq 10^8 \Omega \text{ m}$	Referred to surface Referred to volume
Compression resistance	EN 14617-15	90 - 150 MPa	
Length and width	EN 14617-16	± 0,5 mm	Referred to tiles
Thickness	EN 14617-16	± 0,7 mm	Referred to tiles
Straightness of sides	EN 14617-16	± 0,3 mm	Referred to tiles
Rectangularity	EN 14617-16	± 0,9 mm	Referred to tiles
Centre curvature	EN 14617-16	± 0,2% referred to length	Referred to tiles
Edge curvature	EN 14617-16	± 0,2% referred to length	Referred to tiles
Warping	EN 14617-16	± 0,2% referred to length	Referred to tiles
Mohs hardness	EN 101	up to 3 Mohs	
Thermal conductivity	EN 12524	1,3 W/(m K)	From tabulated values
Reaction to fire	EN 13501-1	A2fl-s1	
Slip resistance	EN 14231	≥ 35 (Dry) ≥ 3 (Wet)	
Slip resistance	DIN 51130	R9	For Honed H9